


钻夹头系列 DRILL CHUCK

CD08-0001 APU带柄自紧钻夹头刀柄 APU DRILL CHUCK HOLDER

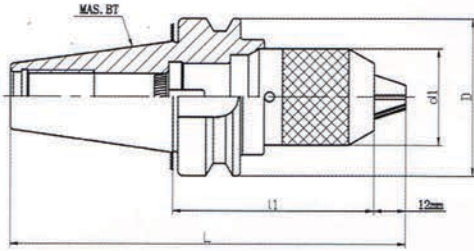

- ◇特征:
- ◎ 连接杆和夹头整合的设计, 防止夹头和接杆意外的被分离
 - ◎ 具有高精度, 高夹紧, 高可靠性和稳定性
 - ◎ 易损部件淬火处理
 - ◎ 具有自紧功能, 轻轻夹紧钻头即可, 在钻孔中随着扭矩的增加而同步增加夹持力, 并能产生明显的高强度夹持力, 从而防止钻头打滑

- ◇Features:
- ◎ Integrated design of the rob and collet, can avoid the collet and rob separate
 - ◎ High accuracy, strong grasp force, and high stability
 - ◎ Easy broken parts are dealt by quenching
 - ◎ Self-tightening, grasp the collet slightly, when drilling, grasp force is enhancing with the torque increasing and develop obvious strong grasp force to prevent the drill remove

型号 Model No. d1-l1	l1	L	D	d1	KGS
BT30-APU08-80	80	137.4	46	37	0.72
BT30-APU13-110	110	170.4	46	50	1.85
BT30-APU16-115	115	180.4	46	57	2.18
BT40-APU08-85	85	159.4	63	37	1.46
BT40-APU13-100	100	177.4	63	50	2.00
BT40-APU16-105	105	187.4	63	57	2.33
BT50-APU08-90	90	200.8	100	37	4.16
BT50-APU13-100	100	213.8	100	50	4.70
BT50-APU13-120	120	223.8	100	50	5.00
BT50-APU13-180	180	293.8	100	50	5.80
BT50-APU16-105	105	218.8	100	57	5.03
BT50-APU16-190	190	303.8	100	57	6.00
SK30-APU08-80	80	136.8	50	37	0.60
SK30-APU13-120	120	179.8	50	50	1.45
SK30-APU16-125	125	189.8	50	57	1.78
SK40-APU08-80	80	148.4	63.55	42	1.78
SK40-APU13-105	105	173.4	63.55	54	2.33
SK40-APU13-135	135	193.4	63.55	54	2.63
SK40-APU16-125	125	193.4	63.55	62	2.83
SK40-APU16-150	150	218.4	63.55	62	3.18
SK50-APU08-80	80	181.75	97.5	42	2.33
SK50-APU13-100	100	201.75	97.5	54	2.63
SK50-APU13-120	120	221.75	97.5	54	2.83
SK50-APU16-100	100	201.75	97.5	62	3.15
SK50-APU16-120	120	221.75	97.5	62	3.25
CAT40-APU5/16-3.75 "	3.75 "	6.44 "	2.5 "	1.65 "	1.85
CAT40-APU1/2-4.75 "	4.75 "	7.44 "	2.5 "	2.13 "	2.10
CAT40-APU5/8-6 "	6 "	8.69 "	2.5 "	2.44 "	2.95
CAT50-APU5/16-4 "	4 "	8 "	3.875 "	1.65 "	2.10
CAT50-APU1/2-4.25 "	4.25 "	8.25 "	3.875 "	2.13 "	2.85
CAT50-APU5/8-4.5 "	4.5 "	8.5 "	3.875 "	2.44 "	3.45